

# Keyhole Road Plates

Standard and Securable Versions

Utilicor Technologies keyhole road plates come in sizes designed to fit 12", 18" or 24" cored openings in both roadways and sidewalks. The standard road plate allows for temporary opening of the roadway or sidewalk to traffic.

For roadway openings longer in duration Utilicor recommends using a securable road plate. Once placed in the cored opening the urethane collar expands securing the plate into the roadway or sidewalk.

## Standard Road Plate Specifications:

Top plate manufactured of 1/4" thick checker plated 44W steel

Powder coated high visibility yellow

4" deep collar rolled to precise specifications ensures a tight fit into cored opening

Resists tipping, spinning and lifting

Weight:


12" / 24 lbs, 18" / 47 lbs, 24" / 73 lbs

Dimensions:

12" size - 18" diameter top plate with 4" deep collar

18" size - 24" diameter top plate with 4" deep collar

24" size - 30" diameter top plate with 4" deep collar

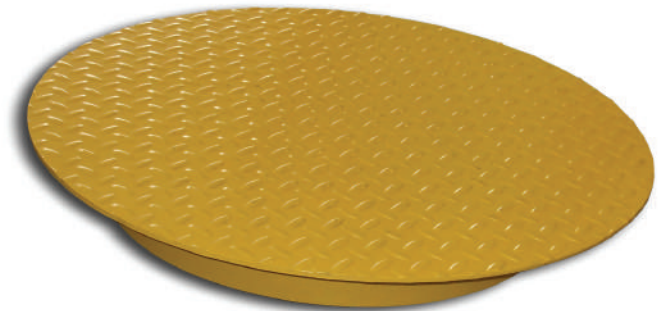

## Securable Road Plate Specifications:

Top plate manufactured of 1/4" thick checker plated 44W steel

Powder coated high visibility yellow

4" deep, urethane compression collar, allows for plate to be secured

Resists tipping, spinning, lifting and reduces possibility of theft / vandalism

Weight:


12" / 32 lbs, 18" / 60 lbs, 24" / 88 lbs

Dimensions:

12" size - 18" diameter top plate with 4" deep collar

18" size - 24" diameter top plate with 4" deep collar

24" size - 30" diameter top plate with 4" deep collar

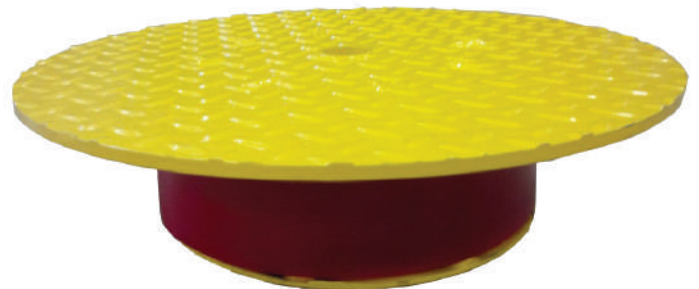

Features:

Five sided stainless steel Penta style bolt resists tampering